

ELEVATION


SECTION-A-A





PLAN VIEW

TOP MOTOR CLEARANCE

| | | | |
|----|-----|-----|-----|
| HP | 14' | 16' | 22' |
| Z | 8' | 7' | 4' |



20 (FRONT) GAUGE
24 (BACK) GAUGE

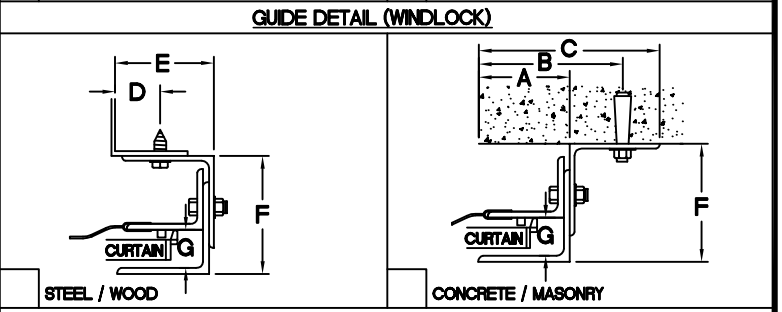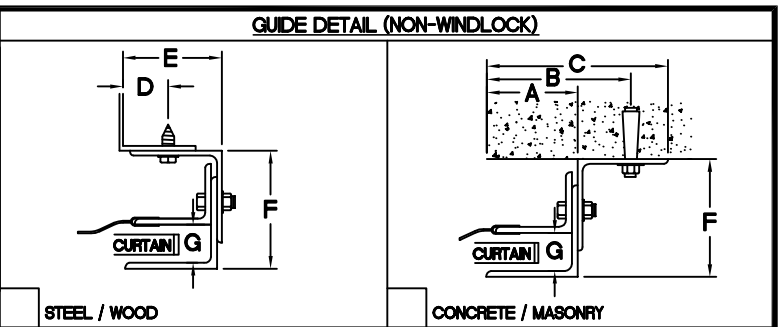

GUIDE DIMENSIONS

| GUIDE TYPE | A | B | C | D | E | F | G |
|------------|--------|--------|--------|--------|----------|--------|--------|
| 2 | 2 5/8" | 3 7/8" | 5 1/8" | 1 1/4" | 2 13/16" | 4" | 1 1/4" |
| 3 | 2 5/8" | 4 3/4" | 5 5/8" | 1 1/4" | 2 13/16" | 4 3/8" | 1 1/4" |
| 4 | 2 5/8" | 4 3/4" | 5 5/8" | 1 1/4" | 2 7/8" | 4 3/4" | 1 1/4" |
| 2(W/L) | 3" | 4 1/4" | 5 1/2" | 1 5/8" | 3 3/16" | 4" | 1 1/2" |
| 3(W/L) | 3" | 5 1/8" | 6" | 1 5/8" | 3 3/16" | 4 3/8" | 1 1/2" |
| 4(W/L) | 3" | 5 1/8" | 6" | 1 5/8" | 3 1/4" | 4 3/4" | 1 1/2" |
| 5(W/L) | 3" | 5 1/8" | 6" | 1 5/8" | 3 1/4" | 4 3/4" | 1 1/2" |
| 6(W/L) | 5 1/4" | 6 1/2" | 7 3/4" | 1 5/8" | 4 7/8" | 7 1/4" | 1 1/2" |

- GENERAL NOTES**
- SLATS/HOOD:** SELECT FINISH OPTION BELOW (HOOD INCLUDES WEATHER BAFFLE)
- GRAY POLYESTER TOP COAT
 - WHITE POLYESTER TOP COAT
- OTHER SURFACES:**
- SHOP COAT BLACK PRIMER
- OPERATION:**
- RIGHT HAND SHOWN, LEFT HAND OPPOSITE
- GUIDES:**
- STRUCTURAL STEEL ANGLES OF 3/16" MINIMUM THICKNESS
 - WITH PVC WEATHER SEAL
- BOTTOM BAR:**
- TWO 2"x2"x1/8" STEEL ANGLES WITH PVC BULB ASTRAGAL

NOTE: ADD 'Z' TO 'X' TO ACHIEVE OVERALL HEADROOM REQUIREMENTS

| MRK. | QTY. | OPENING SIZE | | OPERATION | R.H. | CLEARANCES | | OPTION | PROJECT: | ARCHITECT: | CONTRACTOR: | DISTRIBUTOR: | DATE: | SHEET: | OF: | BY: | REF.# | |
|------|------|--------------|------------|-----------|------|------------|-----|--------|----------|------------|-------------|--------------|-------|--------|-----|-----|-------|--|
| | | WIDTH 'W' | HEIGHT 'H' | | | 'X'+2' | 'V' | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | |



4255 McEver Industrial Dr.
Acworth, GA 30101
PH:(770) 924-2600
Fax:(770) 974-1455
www.astadoor.com

MODEL620 SERIES-INSULATED-FACE OF WALL (GH MOTOR)

Asta Door Corporation is not responsible for the use of improper installation procedures, structural supports as well as field inspection prior to manufacturing and installation.

APPROVAL SIGNATURE: _____ DATE: _____