
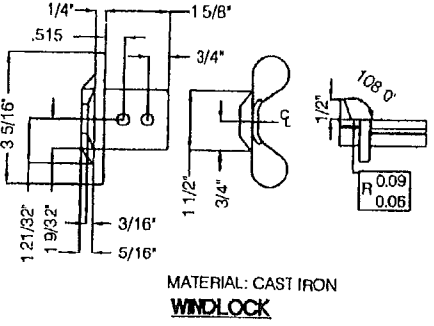





22, 20 OR 18 GAUGE GALVANIZED STEEL FRONT SLAT AND 24 GAUGE GALVANIZED STEE BACKER SLAT, GALVANIZED ACCORDING TO A.S.T.M. A653-G90 AND FINISHED WITH BAKED EPOXY PRIMER AND/OR BAKED POLYESTER TOPCOAT (SEE NOTE 1)

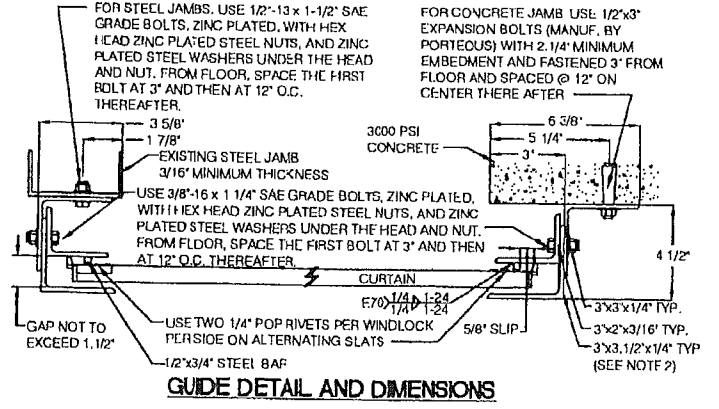

STATE OF TEXAS
 JOSEPH H. DIXON, JR.
 18627
 LICENSED PROFESSIONAL ENGINEER
 SEAL 4/30/13

ASTA Door Corporation
 4255 McEver Industrial Dr.
 Acworth, GA 30101
 PH: (770) 924-2600/Fax: (770) 974-1455
 www.aslador.com

600 SERIES INSULATED SLAT
 CERTIFIED WINDLOAD AND IMPACT
 RATED ROLLING STEEL SERVICE
 DOOR

SCALE: VARIES (DO NOT SCALE DRAWINGS)
 TOLERANCES
 FRACTION = +/- 1/32
 .X = +/- .032
 .XX = +/- .015
 .XXX = +/- .005 <= /- .5
 DRAWN BY: BCLLC
 ISSUE: 08-23-12

TEST SIZE	DESIGN PRESSURE	TEST PRESSURE
18'-6\"/>	480.0/-450.0 PEF	475.0/-475.0 PEF
MODELS	TEST LOCATION ELEMENT-ORLANDO 124 PREMIER ROAD ORLANDO, FL 32822	
622IM-22 GAUGE 620IM-20 GAUGE 618IM-18 GAUGE	TEST REPORT #CSP010181P TEST DATES: 7/16/12 - 7/18/12	
DRAWING # 607-7-600M		SHEET 1 OF 2

Summary of Welded Jamb Connections
E-Guide to Steel Jamb

Series	Door ID	Slat gage	Tested Door* 16'-6" wide	Design Wind Load		Job No.	maximum			all weld spacings are maximums**			
				Pos psf	Neg psf		slip in	P1pf catenary plf	P1nf catenary plf	Slot size	Weld in Slot Only		Weld in Slot plus Fillet Weld at Toe
											min. 3/16" jamb in slot only	in slot	at toe
1/4" Standard Wall Angle													
400	418FIM	18		55.0	55.0	32022	0.625	2000	2000	9/16" x 3/4"	1/4" fillet weld**	1/4" fillet weld**	1/4 x 1-1/2
	420FIM	20		55.0	55.0	"	0.625	2000	2000	9/16" x 3/4"	12" o.c.	12" o.c.	12" o.c.
	422FIM	22	Test	55.0	55.0	"	0.625	2000	2000	9/16" x 3/4"	12" o.c.	12" o.c.	12" o.c.
600	618IM	18		50.0	45.0	32022	0.625	1881	1663	9/16" x 3/4"	1/4" fillet weld**	1/4" fillet weld**	1/4 x 1-1/2
	620IM	20		50.0	45.0	"	0.625	1881	1663	9/16" x 3/4"	12" o.c.	12" o.c.	12" o.c.
	622IM	22	Test	50.0	45.0	"	0.625	1881	1663	9/16" x 3/4"	12" o.c.	12" o.c.	12" o.c.


* doors tested with 1/2" bolts @ 12" o.c. connecting to 3/16" steel jamb per drawing


** fillet weld around full perimeter of slot

*** no spacings exceed the fastener spacing of the test

GENERAL NOTES:

- STEEL USED FOR SLATS IS ASTM-A653 WITH MINIMUM YIELD OF 50 KSI AND TENSILE OF 60 KSI.
- GUIDES COMPOSED OF STRUCTURAL STEEL ANGLES WITH MINIMUM .1875" THICKNESS.
- INSULATION TO BE 5/8" POLYSTYRENE FOAM. EFFECTIVE INSULATING VALUE R= 5.0.
- THE WINDLOCKS ARE ATTACHED TO EVERY OTHER SLAT BEGINNING AT THE BOTTOM SLAT. WINDLOCKS ARE ATTACHED USING TWO - 1/4" RIVETS.
- THIS DOOR HAS BEEN DESIGNED AND TESTED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE AND THE INTERNATIONAL BUILDING CODE. THE DESIGN WIND PRESSURES REQUIRED FOR ANY DOOR SHALL BE DETERMINED USING THE APPROPRIATE SECTION OF THE CODE HAVING JURISDICTION WHERE THE BUILDING IS LOCATED.
- THIS DOOR HAS BEEN SUCCESSFULLY TESTED TO:
 - THE UNIFORM STATIC AIR PRESSURE TEST PER ASTM E-330 AND ANSI/DASMA 108 TO A DESIGN LOAD OF +50.0 & -45.0 PSF
 - THE LARGE MISSILE IMPACT TEST PER TAS 201 AND ANSI/DASMA 115 WITH THE IMPACT DIRECTION TOWARD THE EXTERIOR FACE OF THE SLATS.
 - THE CYCLIC WIND PRESSURE TEST PER TAS 203 AND ANSI/DASMA 115.
 - REFERENCE ELEMENT-ORLANDO, TEST REPORT #ESP010181P, TESTING DATES: 7/16/12 - 7/18/12.
- BOTTOM BAR ASSEMBLY FASTENED 5 3/4" FROM EACH END AND 12" O.C. FROM CENTER USING 5/16" x 1" CARRIAGE BOLTS.

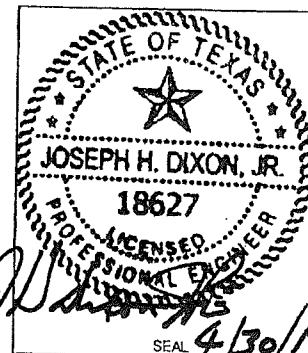

		4255 McEver Industrial Dr. Acworth, GA 30101 PH: (770) 924-2600/Fax: (770) 974-1455 www.astadoor.com	
600 SERIES INSULATED SLAT CERTIFIED WINDLOAD AND IMPACT RATED ROLLING STEEL SERVICE DOOR			
TEST SIZE 16'-6"W x 10'H	DESIGN PRESSURE +80.0/-45.0 PSF	TEST PRESSURE +75.0/-67.00 PSF	
MODELS 622IM-22 GAUGE 620IM-20 GAUGE 618IM-18 GAUGE	TEST LOCATION ELEMENT-ORLANDO 124 PREMIER ROAD ORLANDO, FL 32822 TEST REPORT # ESP010181P TEST DATES: 7/16/12 - 7/18/12		
DRAWN BY: BCLLC ISSUE: 08-23-12		DRAWING # 607-7-600IM	
			SHEET 2 OF 2